



MULTI

MONO

SPINA




STRETTO

TAVOLA ITA

LEGNO
RESINA®
PIETRA

ARMONICO

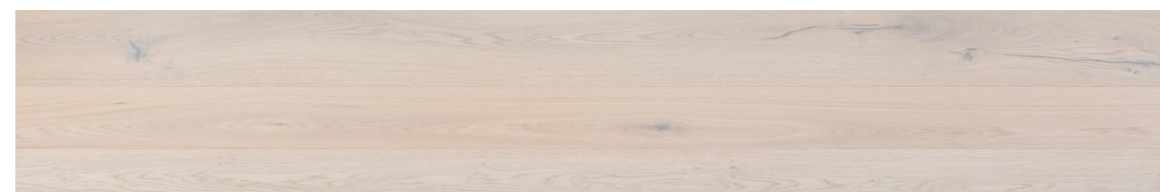

1P



2PW



2PC



3PW




3PC




4PW




4PC

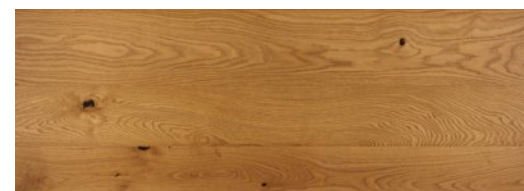

5PW

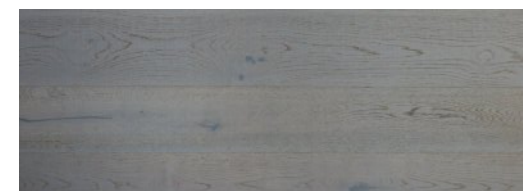

5PC

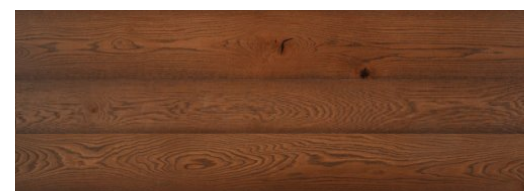

6PW



6PC

LEGNO
RESINA®
PIETRA

ARMONICO
TEXTURE AUDACE

ARMONICO_TEXTURE AUDACE

THE UNRULY SIDE

— SAME COLORS

— SAME SIZES

— SAME GRADES



1P



2PW



2PC



3PW



3PC




4PW



4PC



5PW

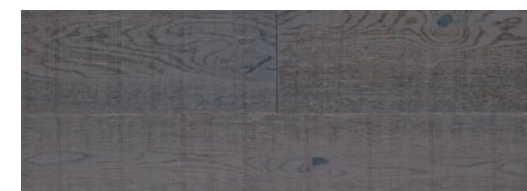

5PC



6PW



6PC



ARMONICO

NAME	SIZE			SELECTION
	WIDTH CM	LENGHT CM	THICKNESS CM	
ARMONICO_MULTI	14-19-23	FROM 70 UP TO 240	1,4/1,5	COUNTRY
ARMONICO_MONO	18/20	FROM 70 UP TO 240	1,4/1,5	SPECIAL
ARMONICO_MONO	18/20	FROM 70 UP TO 240	1,4/1,5	COUNTRY
ARMONICO_STRETTO	4,5	FROM 70 UP TO 240	1,4/1,5	SPECIAL
ARMONICO_STRETTO	4,5	FROM 70 UP TO 240	1,4/1,5	COUNTRY
ARMONICO_SPINA	9	60/70	1,4/1,5	SPECIAL
ARMONICO_SPINA	9	60/70	1,4/1,5	COUNTRY
ARMONICO_TAVOLA	14	FROM 100 UP TO 200	1,0	MIX
ARMONICO_TAVOLA	14	FROM 100 UP TO 200	1,0	COUNTRY
ARMONICO_ITA	9	60/70 CM	1,0/1,1	SPECIAL
ARMONICO_ITA	9	60/70 CM	1,0/1,1	COUNTRY

THE AUDACE TEXTURE IS AVAILABLE IN ALL THE COLOURS, SIZES AND GRADES OF THE ARMONICO COLLECTION

Structure:	Prefinished oak with crossed fiber Conifer or Broadleaf wood support
Nominal wear layer*:	European Oak wood - Multi, Mono, Stretto, Spina: 4 mm thick - Tavola, Ita: 3 mm thick
Surface:	Bevel, Brushing
Installation:	- Glued down: Multi, Mono, Stretto, Spina, Tavola, Ita - Floating: Multi, Mono
Recommended applications:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	- SPECIAL_Rift and flamed with small pin knots - MIX_Rift, flamed, knots of maximum size 15 mm. (25% max.) - COUNTRY_Black filled knots of different dimensions and cracks
Processing:	Industrial
Finish:	Legnoresina® pietra_ Legnoresina® pietra is a revolutionary protection/resin developed by Salis in order to provide the wood flooring with never experienced before features of durability, reliability and performance
Ordinary maintenance:	Dusting pad - Vacuum cleaner. Cleaning with neutral detergent "Deter Wood" and well-squeezed damp soft pad
Extraordinary maintenance:	Spread "Re_Vita" refresher onto the surface with a well-squeezed damp soft pad
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters

*: Meaning the wear layer thickness before the processing of the surface.


ARMONICO

COMPLIMENTARY ITEMS

TRANSITION PIECE

Dimensions:
Lenght 1000 mm
Thickness 10/11-14/15 mm


Matching transition piece for all colours of the Armonico Project.

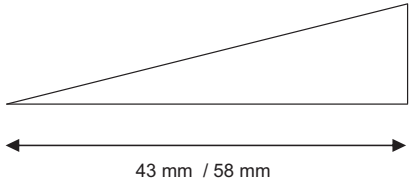

BULLNOSE

Dimensions:
Height 30 mm
Depth 80/110 mm
Lenght 1000 mm abt
Thickness 10/11-14/15 mm


Matching bullnose for all colours of the Armonico Project.

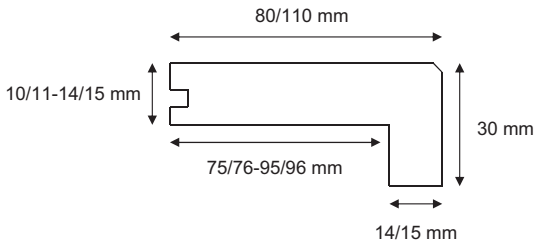

SKIRTING

Dimensions:
Height 80 mm
Lenght 2400 mm about
Thickness 13 mm

Matching skirting for all colours of the Armonico Project.

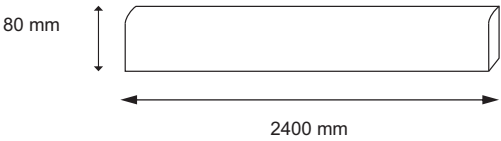

Remark: Armonico collection's coordinated skirting is entirely hand finished. Nevertheless, due to the different production timing and procedure, the finish of the skirting does not perfectly match the floor finish. Furthermore, the skirting doesn't have knots.

Remark: Additional matching skirting types are also available.

MAINTENANCE

NAME	FEATURES
KIT WOOD	ORDINARY AND EXTRAORDINARY MAINTENANCE PROGRAM FOR LEGNORESINA® PIETRA, LEGNORESINA® CERA, OR VARNISH FINISHED FLOORS
KIT REPAIR	WOOD REPAIR