






COLORE

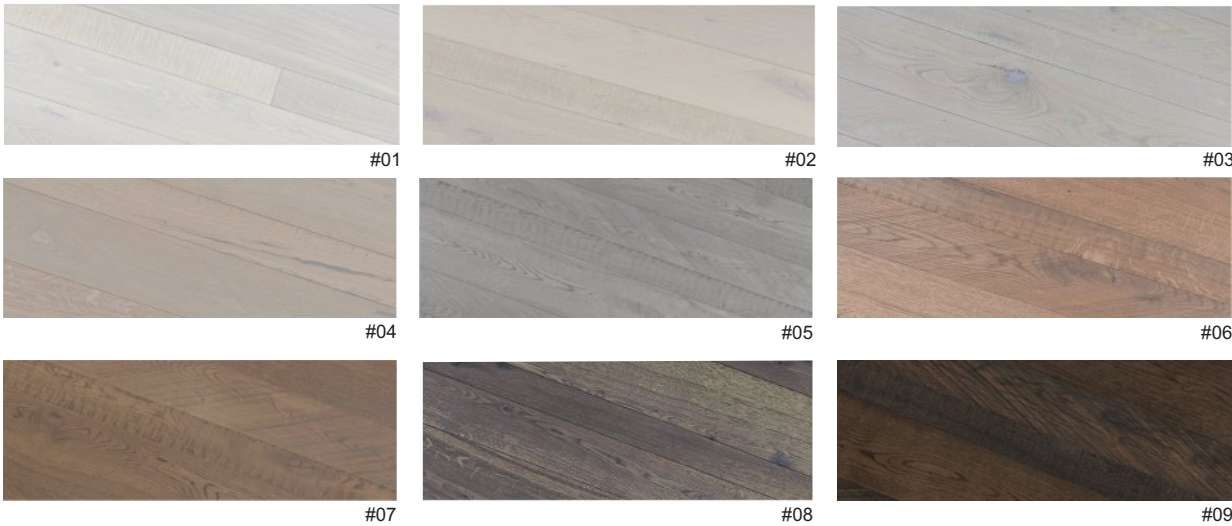

MATERIA

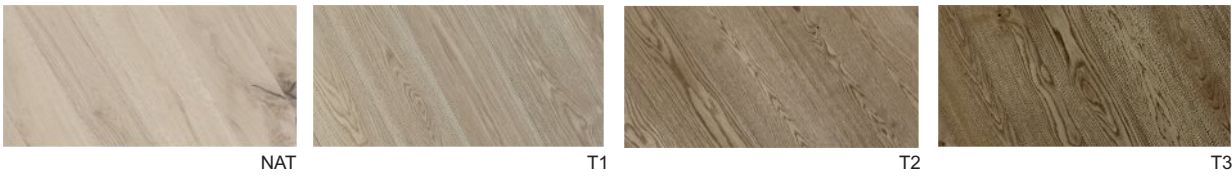

BLEND



OFFICINA107_COLORE/ MATERIA



NAME	SIZE			SELECTION
	WIDTH CM	LENGHT CM	THICKNESS CM	
OFFICINA107_MOSSO	9-14-19	FROM 70 UP TO 240	1,4/1,5	COUNTRY
OFFICINA107_VIVO (brushed)	9-14-19	FROM 70 UP TO 240	1,4/1,5	COUNTRY
OFFICINA107_MONO (brushed)	18-20	FROM 70 UP TO 240	1,4/1,5	SPECIAL
OFFICINA107_MONO (brushed)	18-20	FROM 70 UP TO 240	1,4/1,5	COUNTRY
OFFICINA107_TAVOLA (brushed)	14	FROM 100 UP TO 200	1,0	MIX
OFFICINA107_TAVOLA (brushed)	14	FROM 100 UP TO 200	1,0	COUNTRY
OFFICINA107_ITA (brushed)	9	60/70 CM	1,0/1,1	SPECIAL
OFFICINA107_ITA (brushed)	9	60/70 CM	1,0/1,1	COUNTRY

OFFICINA107_BLEND

NAME	SIZE			SELECTION
	WIDTH CM	LENGHT CM	THICKNESS CM	
OFFICINA107_MAD (brushed)	4,5	FROM 70 UP TO 200	1,4/1,5	COUNTRY

IT IS POSSIBLE TO ORDER THE OFFICINA107’S COLOURS
IN ALL SIZES AND PATTERN OF "ARMONICO" COLLECTION.

Structure:	Prefinished oak with crossed fiber Conifer or Broadleaf wood support
Nominal wear layer*:	European Oak wood - Mosso, Vivo: 4 mm thick - Tavola, Ita: 3 mm thick
Surface:	Bevel, irregular cross etched (saw marks), diagonal engraving, brushing
Installation:	- Glued down: Mosso, Vivo, Tavola, Ita - Floating: Mosso, Vivo, Mad
Recommended applications:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	- SPECIAL_Rift and flamed with small pin knots - MIX_Rift, flamed, knots of maximum size 15 mm. (25% max.) - COUNTRY_Black filled knots of different dimensions and cracks
Processing:	Industrial
Finish:	Legnoresina® pietra_ Legnoresina® pietra is a revolutionary protection/resin developed by Salis in order to provide the wood flooring with never experienced before features of durability, reliability and performance
Ordinary maintenance:	Dusting pad - Vacuum cleaner. Cleaning with neutral detergent “Deter Wood” and well-squeezed damp soft pad
Extraordinary maintenance:	Spread “Re_Vita” refresher onto the surface with a well-squeezed damp soft pad
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters

*: Meaning the wear layer thickness before the processing of the surface.


OFFICINA107

COMPLIMENTARY ITEMS

TRANSITION PIECE

Dimensions:
Lenght 1000 mm
Thickness 10/11-14/15 mm


Matching transition piece for all colours of the Officina107 Project.

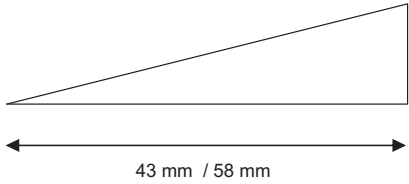

BULLNOSE

Dimensions:
Height 30 mm
Depth 80/110 mm
Lenght 1000 mm abt
Thickness 10/11-14/15 mm


Matching bullnose for all colours of the Officina107 Project.

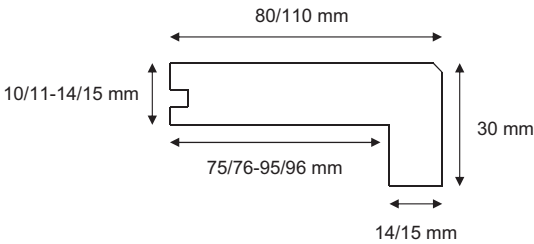

SKIRTING

Dimensions:
Height 80 mm
Lenght 2400 mm about
Thickness 13 mm

Matching skirting for all colours of the Officina107 Project.

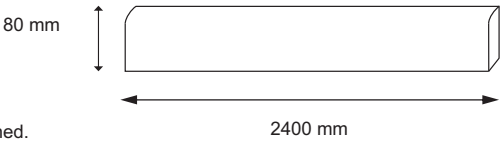

Remark: Officina107 collection's coordinated skirting is entirely hand finished. Nevertheless, due to the different production timing and procedure, the finish of the skirting does not perfectly match the floor finish. Furthermore, the skirting doesn't have knots.

Remark: Additional matching skirting types are also available.

MAINTENANCE

NAME	FEATURES
KIT WOOD	ORDINARY AND EXTRAORDINARY MAINTENANCE PROGRAM FOR LEGNORESINA® PIETRA, LEGNORESINA® CERA, OR VARNISH FINISHED FLOORS
KIT REPAIR	WOOD REPAIR

OFFICINA107_MAIOLICA

NAME	SIZE
MAIOLICA 7.5_15 #01>#09	7,5X15 CM
MAIOLICA 10_30 #01>#09	10X30 CM

OFFICINA107_PITTURA

NAME	SIZE
OFF107 PITTURA #01>#09	5 LT
OFF107 PITTURA #01>#09	14 LT

OFFICINA107_TELETTA

NAME	SIZE
OFF107 TELETTA #01>#09	47X300 CM

OFFICINA107_MANTO

NAME	SIZE
MANTO_ALL COLORS	150X200 CM
MANTO_ALL COLORS	170X230 CM
MANTO_ALL COLORS	200X250 CM
MANTO_ALL COLORS	200X300 CM
MANTO_ALL COLORS	300X400 CM
MANTO/FLOOR_ALL COLORS	200X2.500 CM
MANTO/FLOOR_ALL COLORS	400X2.500 CM
MANTO/FLOOR_ALL COLORS	CUSTOM


MAIOLICA




PITTURA



TELETTA

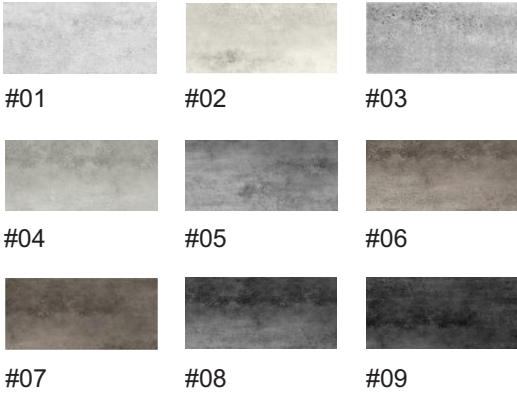

MANTO

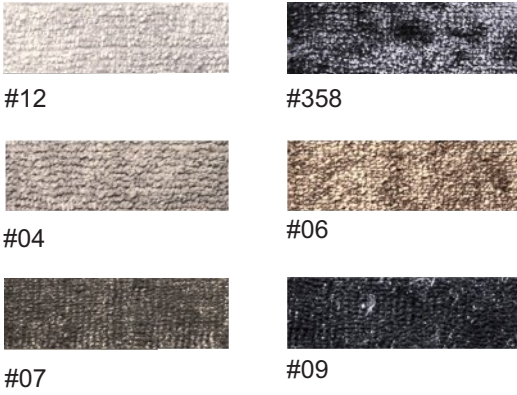

MAIOLICA

The products of the Maiolica collection are single fired ceramic tiles consisting of a mixture of porcelain stoneware and belonging to the Billa Group (UNI EN 14411:2012 standard) of the present European pertaining regulation.

These products are in accordance with the requirements imposed by the CE mark.

The tones and the sizes of Maiolica are different from batch to batch: images and samples are similar but not identical.

Due to the peculiar production process it is recommended to install each tile at a minimum distance of 2 mm from the other.

BOX CONTENT

SIZE 7.5_15:	1,00 SQM
SIZE 10_30:	1,00 SQM

_ AN EXTRA FEE OF 15 EURO WILL BE CHARGED FOR ORDERS OF LESS THAN 10 SQUARE METERS.
_ FOR REPLENISHMENT ORDERS COLOUR SHADES AND SIZE MAY SHOW DIFFERENCES COMPARED TO THE ORIGINAL BATCH

PITTURA

Water based wall painting containing vinyl bonding agents in water emulsion, pigments and special fillers providing a valid covering ability and brightness to the product.

Resistant to cleaning with sponge after an appropriate drying.

Thanks to its particular formula, it does not release volatile organic compounds (low VOC).

Ideal for the painting of any indoor surface, particularly kitchens, bathrooms and in case of steam presence.

APPLICATION

Decoration of old, new or already painted indoor surfaces, in order to enhance the appearance with a silk touch effect, but a low dirt retention.

CONSUMPTION:

STANDARD APPLICATION: 4/6 square meters per litre, 2 coats diluted at 20/25% for roller application. Before the application, it is recommended a first coating with an appropriate primer.

STRIPED EFFECT: in order to obtain a striped effet please follow the next directions:
Apply the first coat diluted at 20/25% and a second one without dilution with a long bristles paint brush. Paint portions not wider than 1.5 linear meters. Immediately after painting the portion, apply the texturizing tool (it can be a stiff bristles plastic broom) vertically or horizontally according to the desired effect.
Consumption for "striped" effect: 2/3 sqm / litre abt.

TELETTA

Vinyl wall paper on TNT support.

DIMENSIONS OF THE ROLLS:

Width	47 cm
Length	300 cm

In order to obtain an irregular texture by following a well-defined design, the packages are composed of 7 rolls (0.47 x 3.00 mt each one).

It is necessary to provide the exact sizes of the walls in order to have the pattern proportioned to the available space.

A suitable glue for the application is provided together with the rolls.

PREPARATION OF THE SUBSTRATE:

The foundation has to be smooth, regular and flat.
The support must not present any moisture and must be absorbent and porous.
On the porous substrate the adhesive must be water based.
We recommend to use a primer in order to improve the performance of the adhesive to the support.

MANTO

MANUFACTURING:	MACHINE TUFTED
FLEECE'S COMPOSITION:	100% POLYPROPYLENE – SD SOLUTION DYED FIBER
WEIGHT:	2.300 GR/MQ ABT
FLEECE'S THICKNESS:	1.2 CM
BACK SUPPORT:	ARTIFICIAL JUT
RESISTANCE TO LIGHT:	>5
THERMAL INSULATION:	0,28 M2 K/W
EDGE OF THE CARPET (rug):	WOVEN RIBBON
STANDARD EDGE:	D- INNER WEBBING
CLEANING:	USE A STANDARD VACUUM CLEANER
WASHING (RUG):	PROFESSIONAL WASH RECOMMENDED

REMARK: MANTO AND MANTO_FLOOR BY OFFICINA 107 ARE MADE OF SYNTETIC FIBRES.

DUE TO THE DIFFERENCES BETWEEN DISTINCT YARN BATCHES AND DYE BATHS, THE SHADES, THE SHADOWS AND THE STRUCTURE CAN DIFFER FROM THEH ORIGINAL SAMPLE.

FURTHERMORE, THE DESCRIBED SIZES MAY VARY UP TO ±5%.